



# Goldeye

## G-032 Cool

- GigE Vision SWIR camera
- Power over Ethernet plus (PoE+)

## Description

Goldeye G-032 SWIR Cool camera stabilized temperature

The Goldeye G-032 SWIR Cool camera supports Power over Ethernet (PoE+) and data transmission with up to 100 m distance. The G-032 Cool, with nitrogen filled cooling chamber and internal fan, is optimized especially for advanced scientific applications.

Save time and money to integrate the camera into your system: A small form factor and multiple mounting options let the camera fit easily into compact system designs. In addition, its standardized GigE Vision interface including Power over Ethernet (PoE+) and comprehensive I/O control options simplify the connection to your software solution and the synchronization with other system components.

The integrated thermo-electric sensor cooling and several on-board image correction features contribute to the Goldeye's outstanding image quality.

Goldeye cameras let you see more beyond the visible.

### Benefits and features


- // Compact industrial design
- // GigE Vision interface with Power over Ethernet
- // Comprehensive I/O control options
- // Automated on-board image correction
- // Extended operating temperature range

### Options

- // Available with C- / F- / M42 Mount

## Specifications

<b>Goldeye</b>	<b>G-032 Cool</b>
Interface	IEEE 802.3 1000BASE-T, IEEE 802.3at (PoE+)
Resolution	636 × 508
Spectral range	900 nm – 1700 nm
Sensor	InGaAs FPA 636 x 508
Sensor type	InGaAs
Sensor size	No standard size
Cell size	25 #m x 25 #m
Cooling temperature	-20 °C, -5 °C, +10 °C, or user-configurable
Dark noise	400 e <sup>-</sup> (Gain0), 170 e <sup>-</sup> (Gain1)
Dark current	30 ke <sup>-</sup> /s (@ -20 °C FPA temperature)
Saturation capacity	1.9 Me <sup>-</sup> (Gain0), 39 ke <sup>-</sup> (Gain1),
Dynamic range	73 dB (Gain0), 47 dB (Gain1),
Lens mount	C- / F- / M42 Mount
Max frame rate at full resolution	100 fps
ADC	14 bit
On-board FIFO	256 Mbyte
<b>Output</b>	
Bit depth	8 - 14 bit bit
Mono modes	Mono8, Mono12, Mono12Packed, Mono14
<b>General purpose inputs/outputs (GPIOs)</b>	
TTL I/Os	LVTTL I/Os: 1 Input, 1 Output
Opto-isolated I/Os	1 Input, 2 Outputs
RS-232	115 200 Baud, 8N1 (adjustable)
<b>Operating conditions/dimensions</b>	
Operating temperature	-20 °C to +55 °C (Case)
Power requirements (DC)	10.8 V to 30.0 V or via PoE+
Power consumption (@12 V)	19 W (@ 12 V DC), 22 W (@ PoE+)
Mass	810 g (w/ C-Mount adapter)
Body dimensions (L × W × H in mm)	90 × 80 × 80
Regulations	CE, RoHS (2011/65/EU), WEEE, FCC Part 15 Class B

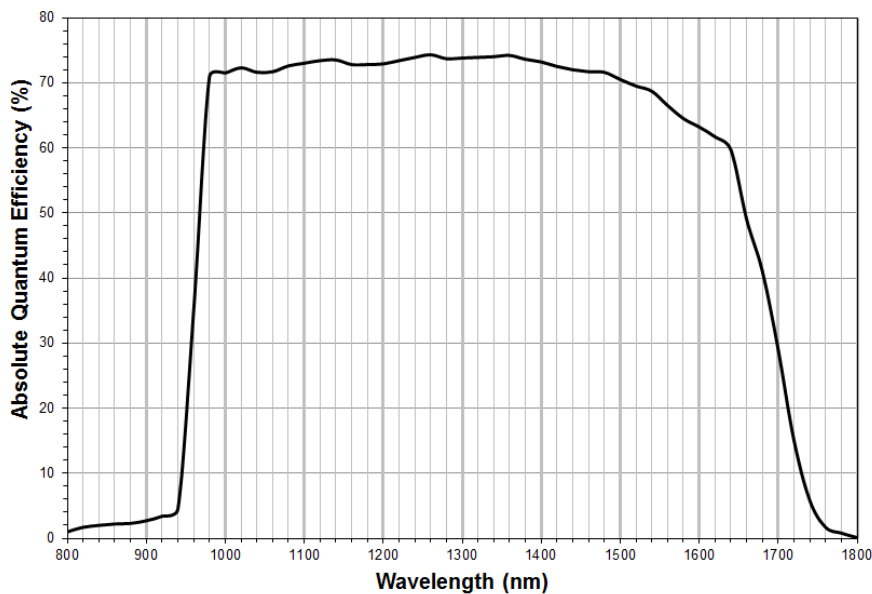

## Features

### IR-specific features (camera and sensor)

- Integrated correction data sets, compensation of sensor inhomogeneities and underlying structure (non-uniformity correction, NUC )
- Defect pixel correction
- Background correction
- Automated and manual sensor temperature management via TEC Features
- Temperature status LED

### General features

- Exposure time control
- Gain (analog)
- I/O configuration and trigger control
- Stream hold (deferred image output)
- Storable user sets
- Firmware update in the field

Goldeye cameras are compatible with Allied Vision's Vimba SDK. Moreover, in combination with Allied Vision's AcquireControl software, extensive image analysis functions are available:

- Pseudo color LUT with several color profiles
- Auto contrast
- Auto brightness

- Analyze multiple regions (rectangular, circle) within the image
- Real-time statistics and histogram display
- ... and more

## Technical drawing

## Applications

Goldeye cameras are very sensitive in the SWIR spectrum. They can be used in an extended operating temperature range. Thanks to TEC cooling and integrated image correction, Goldeye cameras achieve an outstanding image quality with little noise and a high dynamic range. They are well-suited for many typical SWIR applications in various industry branches:

- Semiconductor industry: solar cell and chip inspection
- Recycling industry: plastics sorting
- Medical imaging, sciences: hyperspectral imaging, microscopy, OCT
- Metal and glass industry: thermal imaging of hot objects (250 °C to 800 °C)
- Agriculture industry: airborne remote sensing
- Printing industry: banknote inspection
- Electronics industry: laser beam profiling
- Surveillance and security: vision enhancement (e.g., through fog or night vision)
- ... and many more

### White Paper

To learn more about typical application fields for SWIR cameras, download our White Paper:

[Seeing beyond the visible – short-wave infrared \(SWIR\) cameras offer new application fields in machine vision](#)