

# Prosilica GT

## 1660



- Versatile temperature range for extreme environments
- PTP
- PoE
- P-Iris and DC-Iris lens control

## Description

### 2 Megapixel CCD camera for extreme environments - GigE Vision#

Prosilica GT1660 is a 2 Megapixel camera with a Gigabit Ethernet interface (GigE Vision#).#GT1660 incorporates a high-quality OnSemi KAI-02050 CCD sensor providing excellent monochrome and color image quality. GT1660 is a rugged camera designed to operate in extreme environments and fluctuating lighting conditions. GT1660 offers Precise iris lens control allowing users to fix the aperture size to optimize depth of field, exposure, and gain without the need for additional control elements. #


#### Options:

- Various IR cut/pass filters and lens mounts
- Sensor variant: Taped#glass and microlens#
- Sensor variant: Taped#glass #and no microlens#

## Specifications

Prosilica GT	1660
Interface	IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE)
Resolution	1600×1200
Sensor	OnSemi KAI-02050
Sensor type	CCD Progressive
Sensor size	Type 2/3
Cell size	5.5 μm
Lens mount	C (adjustable)
Max frame rate at full resolution	62 fps
ADC	14 bit
On-board FIFO	128
<b>Output</b>	
Bit depth	14 (mono) - 12 (color) bit

<b>Prosilica GT</b>	<b>1660</b>
Mono modes	Mono8, Mono12, Mono12Packed, Mono14
Color modes RGB	RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed
Raw modes	BayerGR8, BayerGR12, BayerGR12Packed
<b>General purpose inputs/outputs (GPIOs)</b>	
TTL I/Os	1
Opto-isolated I/Os	1 input, 2 outputs
RS-232	1
<b>Operating conditions/dimensions</b>	
Operating temperature	-20°C ... +60°C
Power requirements (DC)	PoE, or 7-25 VDC
Power consumption (@12 V)	5.1 W@ 12 VDC
Mass	224 g
Body dimensions (L × W × H in mm)	92 × 53.3 × 33 (including connectors, w/o tripod and lens)
Regulations	CE, FCC Class A, RoHS (2011/65/EU)

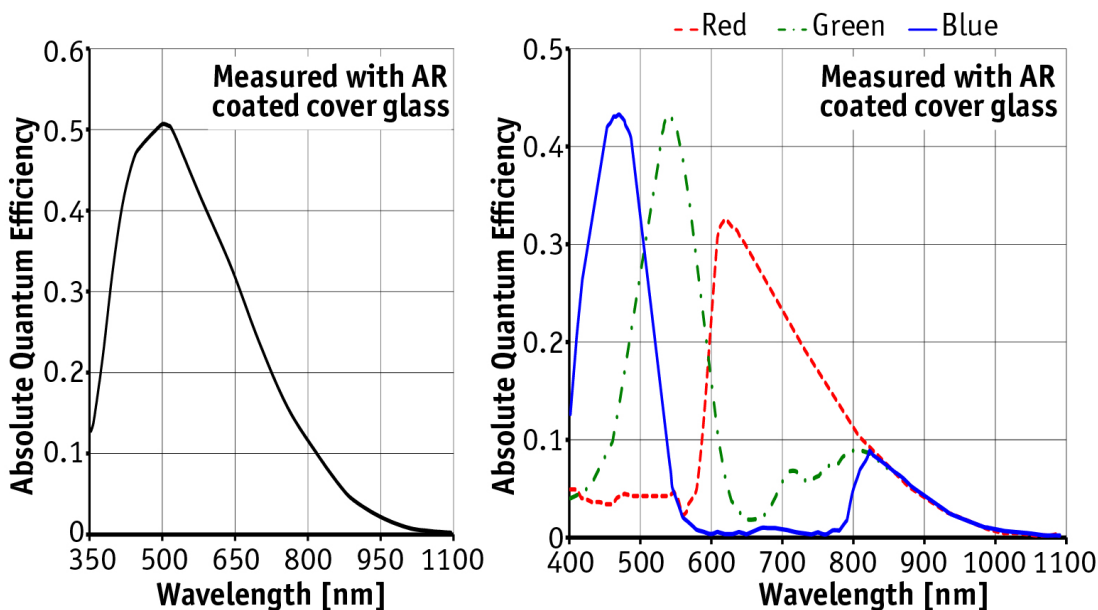

## Features


Prosilica GT1660 features include:

- Precision Time Protocol (IEEE 1588)
- Camera and sensor temperature monitoring



- Auto iris (P-Iris and DC-Iris)
- ROI, separate ROI for auto features
- Binning
- Auto gain (manual gain control: 0 to 32 dB)
- Auto exposure (manual exposure control: 10  $\mu$ s to 26.8 s)
- Auto white balance
- Gamma
- Hue, saturation, color correction
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO
- Event channel
- Chunk data
- Storable user sets

## Technical drawing

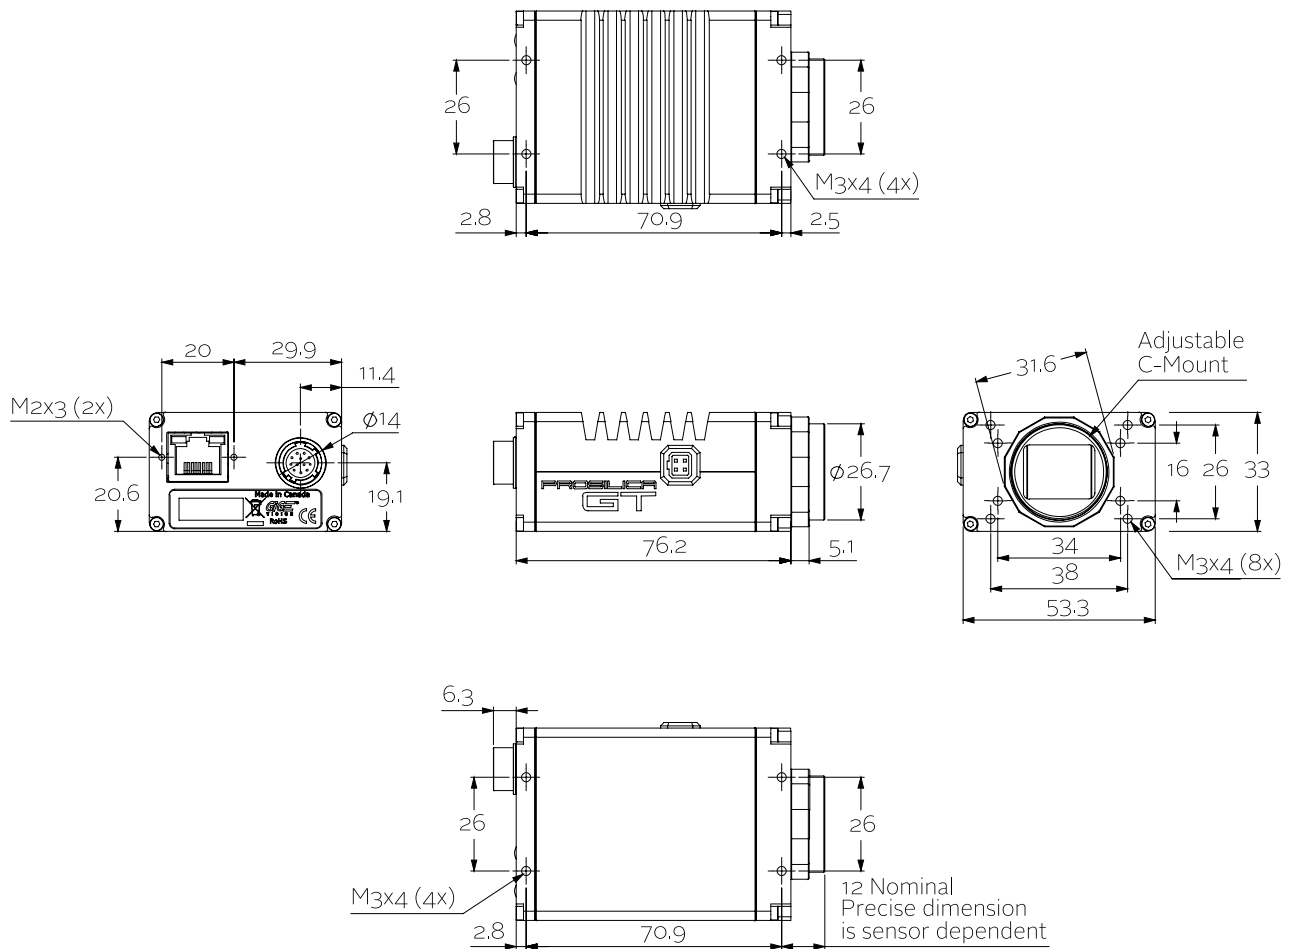

## Applications

Prosilica GT1660 is ideal for a wide range of applications including:



- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- Machine vision
- Military and space applications

K-AVTO37-11/2015 - Subject to technical change without notice. No liability is accepted for errors which may be contained in this document.