


▲ A7500PG400E

- 1Gbps Ethernet interface , max 100m transmission
- 128MB on-board frame buffer
- Support multiple image data formats
- Conform to CE, FCC, UL and RoHS certifications
- Software trigger/Hardware trigger/Free run mode
- Compatible with GigE Vision V2.0 protocol and GenICam standard

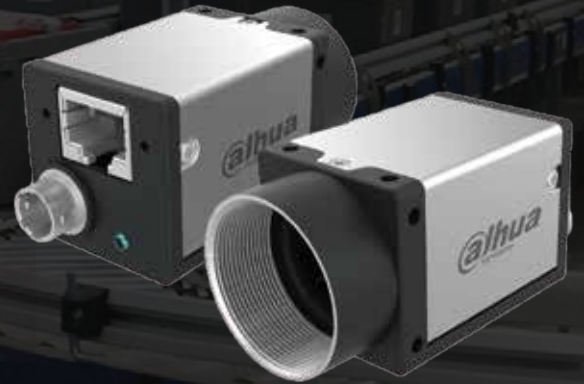


Specification

Model	Sensor	Sensor type	Shutter	Resolution	Frame rate (fps)	Bit depth	Interface	Mono/Color	Pixel size (μ m)	Sensor size
A7500PG400E	IMX250MZR	CMOS	Global	2448 x 2048	24	12	GigE, POE	P	3.45 x 3.45	2/3"

Model	A7500PG400E
Effective Pixels	5.0MP
SNR	>38dB
Dynamic Range	70dB
GPIO	6 pin Hirose: 1 Opto-isolated input, 1 Opto-isolated output, 1 configurable input/output without opto isolation
Image Format	Mono8, BayerRG8/10/10Packed, BayerGB8/10/10Packed, YUV422Packed
Binning	--
ROI	Support
Gain	X1~X32
Gamma	Range from 0 to 4, support LUT
Exposure Time	32.73μS~1S
Trigger Mode	Software trigger/Hardware trigger/Free run mode
Image Buffer	64MB
SPC	Support
User Setting	Support two sets of user-defined configurations
Dimensions	29mmx29mmx42mm(not including lens mount and rear case connector)
Weight	88g
Power Supply	POE/DC power supply by Hirose connector, with voltage range from 6V to 26V
Power Consumption	12V≈3.2W
Lens Mount	C
Temperature	Storage temperature: -30° C~ + 80° C; Operation temperature: -30° C~+50° C


Spectrogram

A7500PG400E

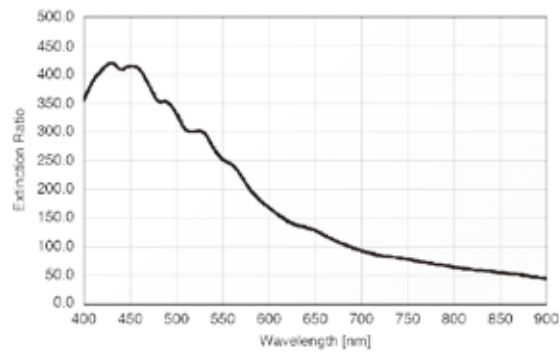


Quantum Efficiency Curve for Mono and Color Sensor

Dimensions

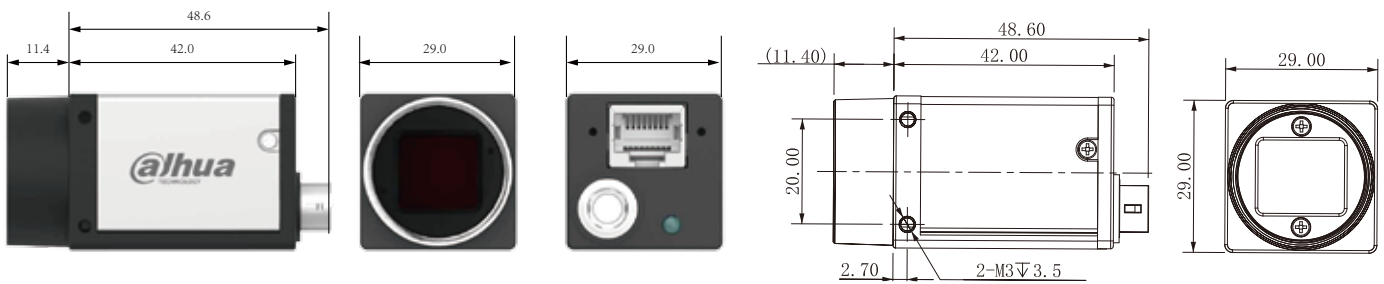

IO Interface Instruction

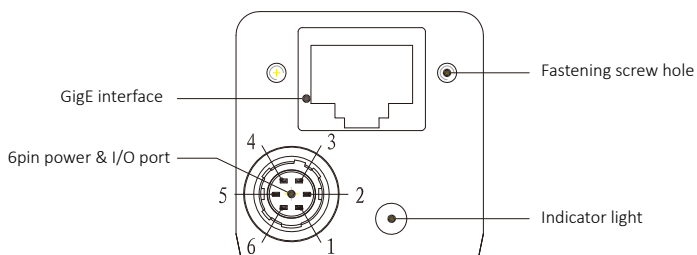

Pin	Signal	Description
1	Power	DC 6V-26V input
2	Line1	Opto-isolated input
3	Line2	Configurable IO input/output
4	Line0	Opto-isolated output
5	IO GND	Opto-isolated ground
6	GND	Ground