

PHLOX

A VISION
AHEAD

HOW TO READ THE PRODUCT KEY

Manufacturer	Source colour	Light Output Area/Length	Injection process	Input voltage
PHLOX	LEDR	BL - 400x200	LLUB	Q - 1R - 24V
Source type	Product type	Range	Number of light sources' rows per cu	



PHLOX® EXCLUSIVE LIGHT PROCESS
WORLDWIDE PATENT ISSUED

NEW!

LLUB (Long life Ultra Bright) Red led Backlight 400x200

LESS THAN 20% LUMINANCE LOSS AFTER 100 000 HOURS (*)

PHLOX - LEDR - BL - 400x200 - LLUB - Q - 1R - 24V

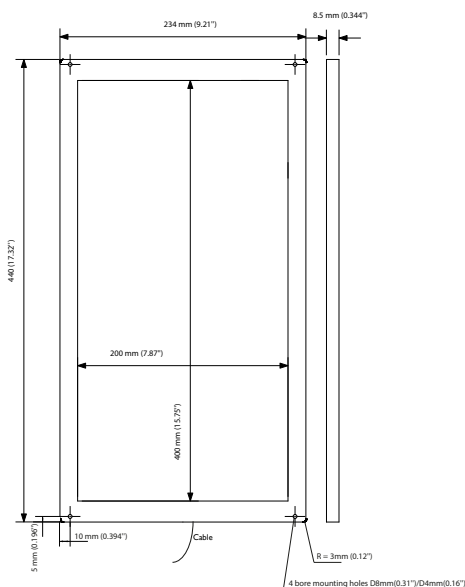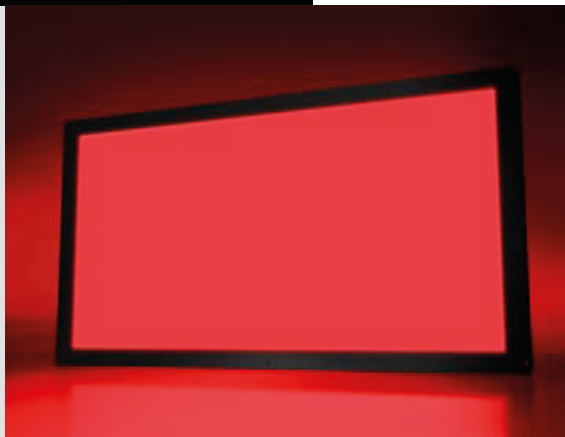

Illumination

Luminance minimum	≥6 000 cd/m ² continuous mode
Uniformity minimum	≥95% (+/- 10%)
Source Type	Red LED
Wavelength	625 nm(+/- 15)
Light Angular Distribution	30° 1/2 angle
Expected Life	> 100 000 hours

Electrical

Input Voltage	24 VDC (continuous mode)
Input Current	≤950 mA (continuous mode)
Cable length	2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")
Connector	None
Cable pinout	■ +
CE Conformity	Yes
Strobe mode	Max. Cur: 3.8A / Pulse Width: 10ms / Duty Ratio: 1/10


Outer unit

L x W x H	440 x 234 x 8.5 mm (17.32 x 9.21 x 0.334")
Housing Material	Black Anodized Aluminium
Weight	1 160 g (40.91 oz)
Mounting	4 bore holes (D8 for the first 3.5 mm of height, D4 for the other 5.5 mm)

Environmental

Max. Operating Humidity	95% non-condensing
Operating Temperature	50°C (122°F) max
Storage Temperature	60°C (140°F) max
Shelf life	12 months from date of purchase
Max.temp.on housing	+80°C (+176°F)

area of temperature measurement
30mm all along the edges of the back of
the black anodized aluminium housing
(see image)



Do not cover the backlight when it's switched on.

Accessories

Power supply: 110V and 220V
Product key: OMRON-LED-PS-108x100x40-24V

« Strobe » Control Module

GARDASOFT RT Series Led Lighting Controllers
You can find the nearest distributor on
<http://www.gardasoft.com/LED-Controllers/RT-PP/>

CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

RoHS directive compliant

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity and luminance
- Seal of quality on the back

July 21 2015

LLUB Backlights by PHLOX® offer the **best life cycle**, and the **best luminance on the market**, all in an ultra compact and IP-65 body. PHLOX® is the only manufacturer to provide uniformity and luminance datas on the quality control seal positioned at the back of every backlight.

DESIGNED

FOR YOUR APPLICATION

- Bottle inspection (glass and plastic)
- Particle measurement
- Picture digitalization
- Dimensional control
- Shaping control
- Quality control with transparency.

& YOUR INDUSTRIAL SECTOR

- Glassmaking
- Pharmaceutical/Cosmetics
- Automotive
- Agribusiness
- Electronics
- Aeronautics and space.

Imaging is our passion.

www.stemmer-imaging.com

STEMMER IMAGING Head Office

Gutenbergstraße 9 - 13, D-82178 Puchheim

Phone: +49 89 80902-0, info@stemmer-imaging.de

STEMMER
IMAGING