



For FA/Machine Vision Fixed Focal

HF12.5SA-1


Applicable camera (model)

1 2/3 1/2 1/3 1/4

FIXED Fixed Focal
5 Mega For Megapixel Camera
MANUAL Manual Iris
C-mt C Mount
METAL Metal Mount
F1.4 Wide Aperture Rate



- High-resolution design, providing support for up to 5 megapixel camera resolution.
- Rear focusing system provides improved performance in macro photography.
- Wide-aperture (F1.4) design achieves clear images under low light intensity.
- Enhanced image recognition accuracy achieved by reduction of distortion and improvement of illumination uniformity.
- Robust enclosure resistant to vibrations and shocks. Equipped with locking knobs for the iris and the focus.

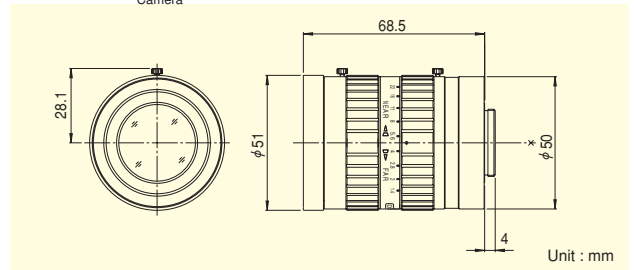

FIXED FOCAL LENGTH LENSES

Focal Length (mm)		12.5
Iris Range		F1.4 ~ F22
Operation	Focus	Manual
	Iris	Manual
Angle Of View (H×V)	2/3"	38°47' × 29°35'
	1/2"	28°43' × 21°44'
	1/3"	21°44' × 16°23'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.1
Object Dimensions at M.O.D. (H×V) (mm)	2/3"	83 × 62
	1/2"	60 × 45
	1/3"	45 × 34
Back Focal Distance (in air) (mm)		16.07
Exit Pupil Position (From Image Plane) (mm)		-101
Filter Thread (mm)		M49 × 0.75
Mount		C
Mass (g)		295

Remarks
 • With Metal Mount
 • With Locking Knob for Iris and Focus



For FA/Machine Vision Fixed Focal

HF16SA-1


Applicable camera (model)

1 2/3 1/2 1/3 1/4

FIXED Fixed Focal
5 Mega For Megapixel Camera
MANUAL Manual Iris
C-mt C Mount
METAL Metal Mount
F1.4 Wide Aperture Rate



- High-resolution design, providing support for up to 5 megapixel camera resolution.
- Rear focusing system provides improved performance in macro photography.
- Wide-aperture (F1.4) design achieves clear images under low light intensity.
- Enhanced image recognition accuracy achieved by reduction of distortion and improvement of illumination uniformity.
- Robust enclosure resistant to vibrations and shocks. Equipped with locking knobs for the iris and the focus.

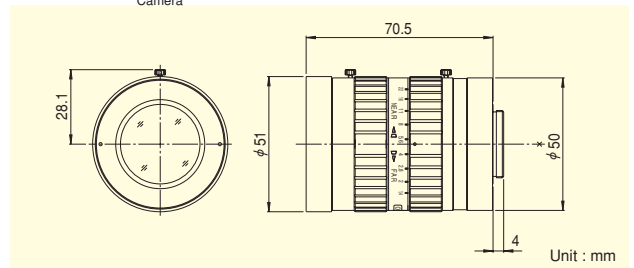

Focal Length (mm)		16
Iris Range		F1.4 ~ F22
Operation	Focus	Manual
	Iris	Manual
Angle Of View (H×V)	2/3"	30°45' × 23°18'
	1/2"	22°37' × 17°04'
	1/3"	17°04' × 12°50'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.1
Object Dimensions at M.O.D. (H×V) (mm)	2/3"	69 × 51
	1/2"	50 × 37
	1/3"	37 × 28
Back Focal Distance (in air) (mm)		17.99
Exit Pupil Position (From Image Plane) (mm)		-172
Filter Thread (mm)		M49 × 0.75
Mount		C
Mass (g)		285

Remarks
 • With Metal Mount
 • With Locking Knob for Iris and Focus

G-1

FUJINON CCTV LENS

WWW.STEMMER-IMAGING.COM · IMAGING IS OUR PASSION

GERMANY
 AUSTRIA
 Phone: +49 89 80902-0
 info@stemmer-imaging.de

UNITED KINGDOM
 IRELAND
 Phone: +44 1252 780000
 info@stemmer-imaging.co.uk

FRANCE
 Phone: +33 1 45069560
 info@stemmer-imaging.fr

SWITZERLAND
 LIECHTENSTEIN
 Phone: +41 55 415 90 90
 info@stemmer-imaging.ch

THE NETHERLANDS
 BELGIUM · LUXEMBOURG
 Phone: +31 575 798888
 info@stemmer-imaging.nl

STEMMER®
 IMAGING

O-FUJ112-11/2013 · Subject to technical change without notice. No liability is accepted for errors which may be contained in this document.