

Analog Control Units PJ Series

Four Models for your Working Environment.


The PJ Series consists of Analog Control Units for the HLV2 Series. They provide stepless intensity control for a variable current. Models are available with 2 or 3 output channels for Light Units. You can also select between AC and DC for the power source.



Specifications

Model	PJ-1505-2CA	PJ-1505-3CA	PJ-1505-2CD24	PJ-1505-3CD24
Direct number	2000131	2000136	2000134	2000139
Input voltage(rated)	100 to 240 VAC		24 VDC	
Input voltage(range)	85 to 264 VAC		10 to 24 VDC	
Power consumption	27VA typ.	37VA typ.	10W typ.	14.5W typ.
Number of channels	2	3	2	3
Output voltage (maximum rated)	5.5 VDC			
Light intensity control	Manual: Front light intensity dial Remote (external): Analog input voltage of 0 to 5 V (5.25 V maximum)			
ON/OFF control	OFF: 2.5 to 5.0 V (24 V maximum) ON: 0.8 to 0 V (pulled down with 4.7 kΩ)			
External control connector	D-Sub, 15-pin (plug)			
Weight(max.)	640g	660g	380g	

Dimension Diagrams (Unit: mm)

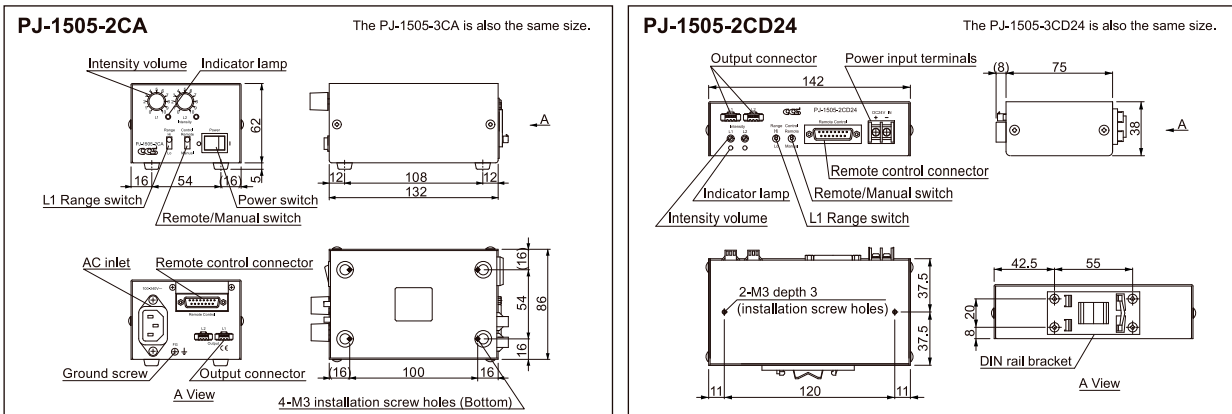

Options for PJ Series

External control cable
Direct number:3000569
Model:EXCB2-B3(3m)

No.	Cable color	No.	Cable color
1	Black	9	Gray
2	White	10	Pink
3	Red	11	White/Black
4	Green	12	Red/Black
5	Yellow	13	Green/Black
6	Brown	14	Yellow/Black
7	Blue	15	Brown/Black
8	Purple	no connection	(Blue/Black)