

## VRmAVC-2 PRO

USB 2.0 Framegrabber in Aluminium Housing


- Connect any analog NTSC or PAL camera to a PC or laptop via highspeed USB
- Cost effective for high volumes
- Timestamps and framecounters
- Store up to nine user configurations (format, contrast, calibration data, ...) in the device
- SDK and API included
- Individual form factors available



## Analog Video Input Formats

Color Formats	YUV, gray
PAL	720 x 576 (25 Hz) deinterlaced
	360 x 288 (25 Hz)
	720 x 288 (50 Hz)
NTSC	720 x 480 (30 Hz) deinterlaced
	360 x 240 (30 Hz)
	720 x 240 (60 Hz)

Photos similar to original product

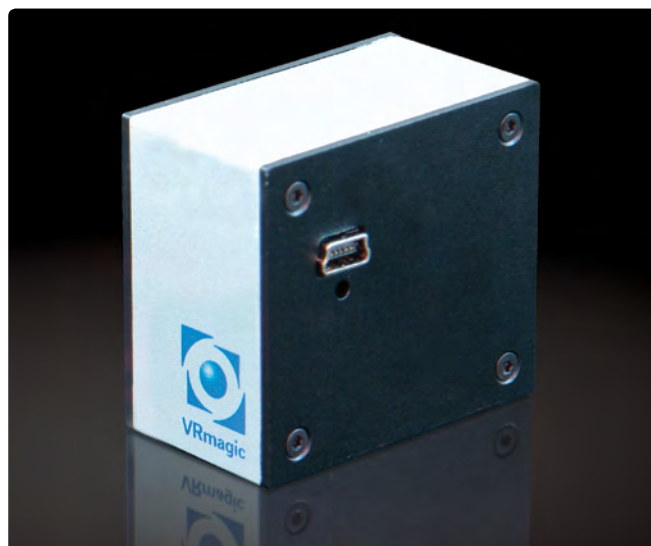

## Interfaces

Composite (using 1 cinch connector)

Y/C (using 2 cinch connectors)

S-Video (4-pin mini-DIN connector)

USB connector for video output (USB Mini-B)

Power supply via USB

## Physical Characteristics

### Housing


Dimensions 46 x 42 x 33 mm

Material anodized aluminium

### Ambient Conditions

Operating Temperature 0 ... +40 °C

Storage Temperature -30 ... +80 °C

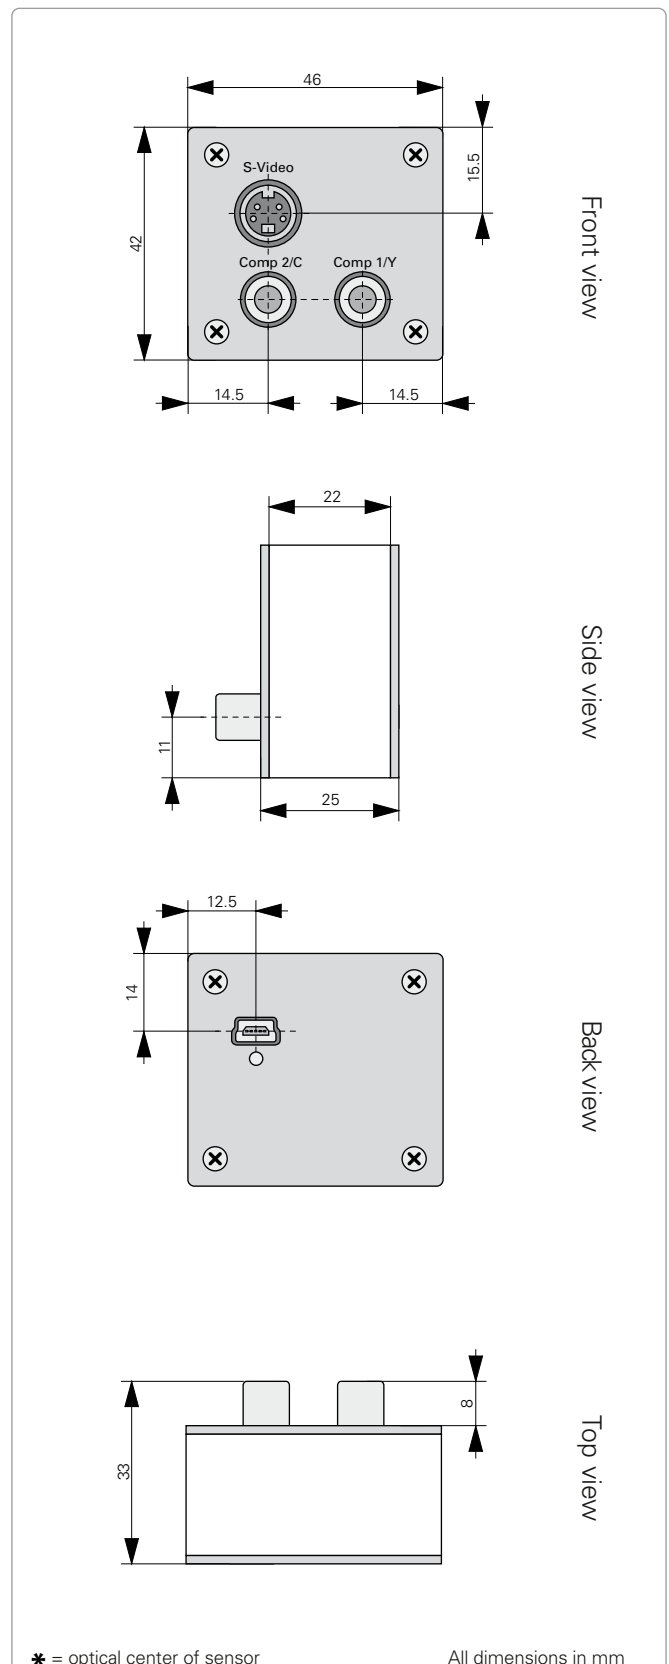

FG-VRM3-10/2013 · Subject to technical change without notice. No liability is accepted for errors which may be contained in this document.

