

# Piranha HS-S0-06K80-00-R

High Sensitivity Line Scan Cameras



## 6k resolution and 142 kHz line rate

The Piranha HS 6k camera with a maximum line rate of 142 kHz is the newest member of the HS family of high sensitivity line scan cameras.

The HS 6k camera is capable of bidirectional operation with up to 256 stages of selectability, while preventing overexposure with antiblooming features. Camera configuration is flexible and all software is controllable.

### Key Features

- 6,000 pixels
- 10.4  $\mu\text{m}$  pixel size
- Max 142 kHz line rate
- Responsivity 1200 DN/(nJ/cm<sup>2</sup>) @ 0 dB, 8 bit
- Bidirectional
- Antiblooming
- HSLink interface

### Programmability

- Up to 256 TDI stages selectable
- Selectable area mode of operation for ease of alignment
- Up to four sets of flat field correction coefficients
- Mirroring and forward/reverse control
- Flat field corrections

### Typical Applications


- Flat panel display inspection
- PCB/electronics inspection
- Large web applications
- High performance document scanning
- Low light applications

### Specifications


Resolution	6,000 x 256 pixels TDI
Data Rate	Up to 1.08 Gpix/s
Max. Line/Frame Rate	142 kHz
Pixel Size	10.4 $\mu\text{m}$ x 10.4 $\mu\text{m}$
Data Format	8, 10, or 12 bit
Output	HSLink
Lens Mount	M72 x 0.75
Responsivity	1200 DN/(nJ/cm <sup>2</sup> ) at 0 dB, 8 bit
Dynamic Range	500 : 1
Nominal Gain Range	0 dB to 20 dB
Size	180 mm (H) x 90 mm (W) x 92.1 mm (D)
Mass	< 1500 g
Operating Temp	0 °C to 50 °C
Power Supply	24 VDC
Power Dissipation	< 44 W
Regulatory Compliance	RoHS and CE
Control	HSLink
Data	Shared with Control
Power	Lemo 2 pin
Example Part Number	HS-S0-06k80-00-R

# Piranha HS-S0-06K80-00-R

High Sensitivity Line Scan Cameras

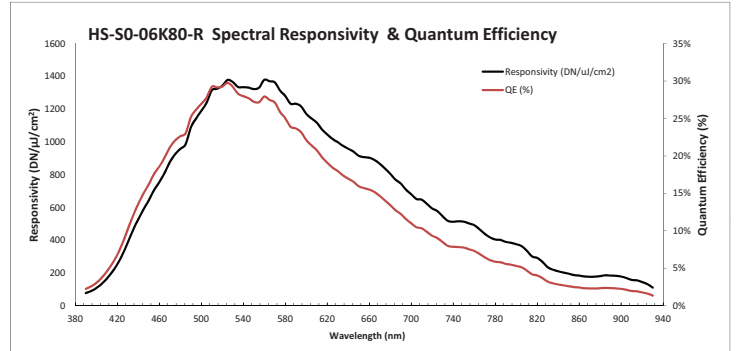

\*Settings 0 dB gain and 12-bit

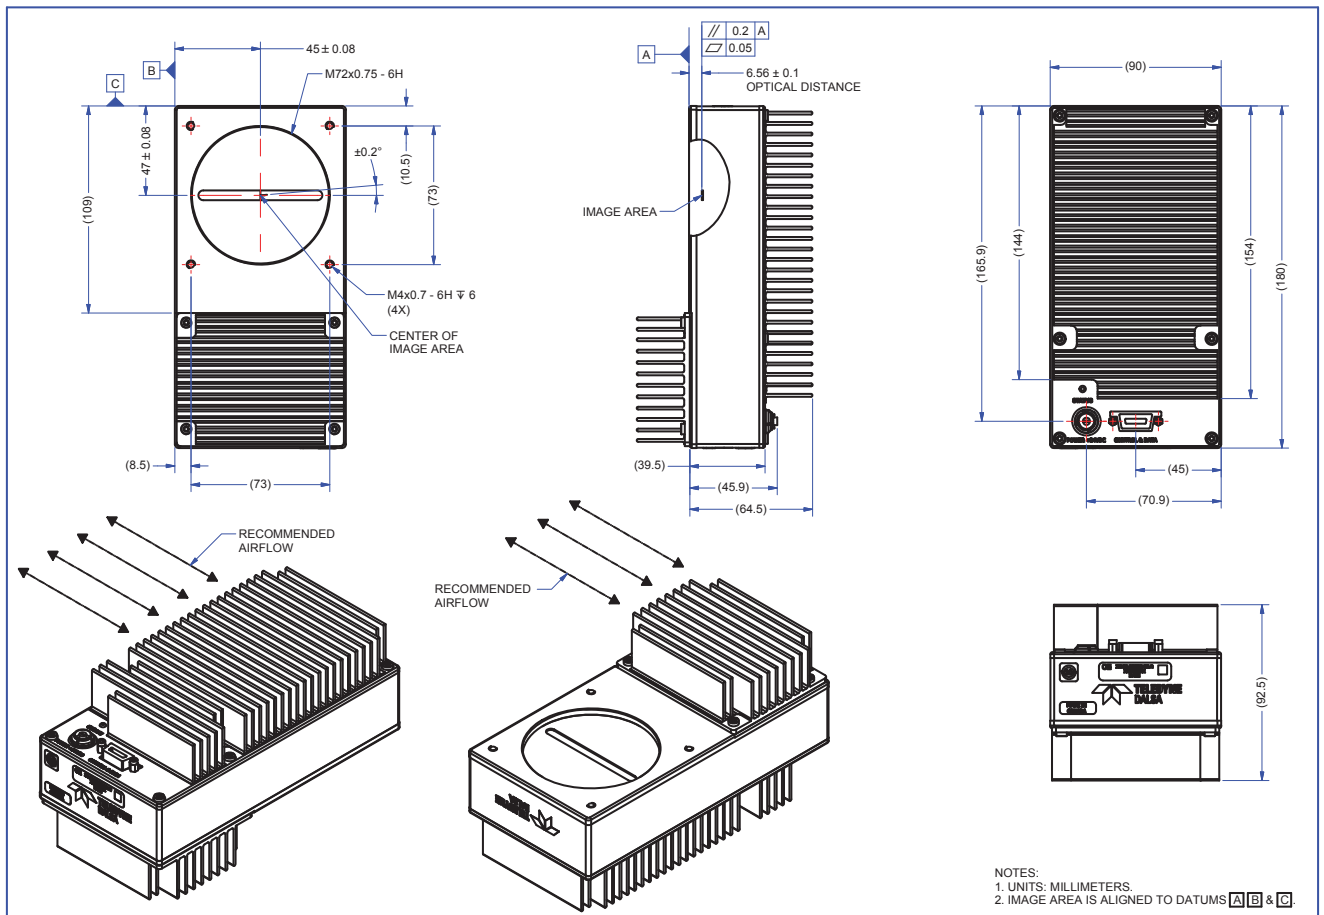

K:TEDA79-11/2014 - Subject to technical change without notice. No liability is accepted for errors which may be contained in this document.