

USB components

VRmC-12/C-PRO

VRmC-12/BW-PRO

USB 2.0 Camera in Aluminium Housing

- Highspeed USB interface
- Cost effective for high volumes
- SDK and API included, same API on all cameras
- Trigger input and strobe output

Sensor Characteristics

Type	Aptina MT9V024
Technology	CMOS, global shutter
Mono/Color	monochrome or color
Sensor Size	1/3" wide
Resolution	754 x 480
Pixel Size	6 μm x 6 μm
Max. Frame Rate *	70 Hz
Min. Exposure Time	30 μs
Bit Depth	8/10 bit
Pixel Clock	13 ... 27 MHz
Responsivity	4.8 V/lux·sec
Dynamic Range	55 dB linear 80 ... 100 dB high dynamic

Camera Features

User programmable windowing and panning

Freely definable region of interest (ROI)


Adjustable anti-blooming circuit

Parallel operation of multiple cameras possible


Sensor readout flip



Photo similar to original product

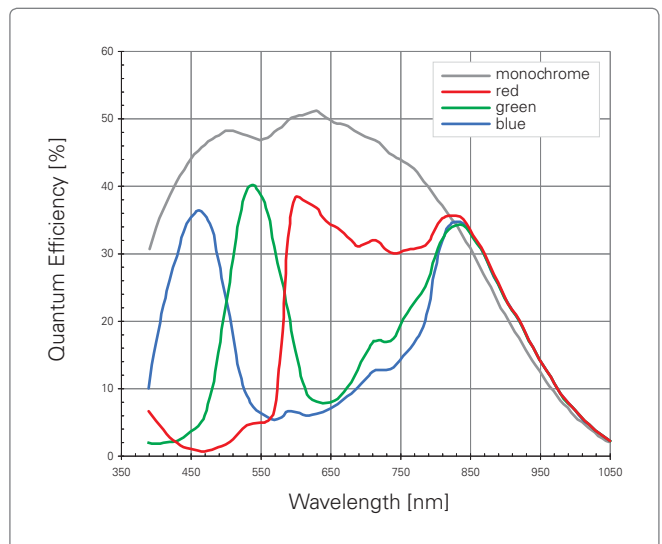

MPE Garry Micro-T 386-2-021-ZS0



Pin	Signal	Pin	Signal
1	GND	9	GND
2	Strobe Out - (potential-free)	10	+5 V I/O
3	Strobe Out + (potential-free)	11	+5 V I/O
4	TTL Strobe Out (+5 V)	12-21	reserved
5	GND		
6	Trigger In - (potential-free)		
7	Trigger In + (potential-free)		
8	TTL Trigger In (+3.3 ... 5 V)		

* Maximum value at full ROI with minimum exposure time. Actual value depends on pixel clock, sensor settings, and image format.

Physical Characteristics

Housing

Dimensions	46 x 42 x 38 mm
Material	anodized aluminium
Lens Mount	C-Mount (lens not included)
Filter glass	included

Ambient Conditions

Operating Temperature	0 ... +40 °C
Storage Temperature	-30 ... +80 °C

Interfaces


USB 2.0 port (USB Mini-B); power supply via USB

MPE-Garry Micro-T Connector for Trigger, Strobe, and external power supply

Options

Optics

- Filters: window glass, IR-pass/cut filter, without filter.

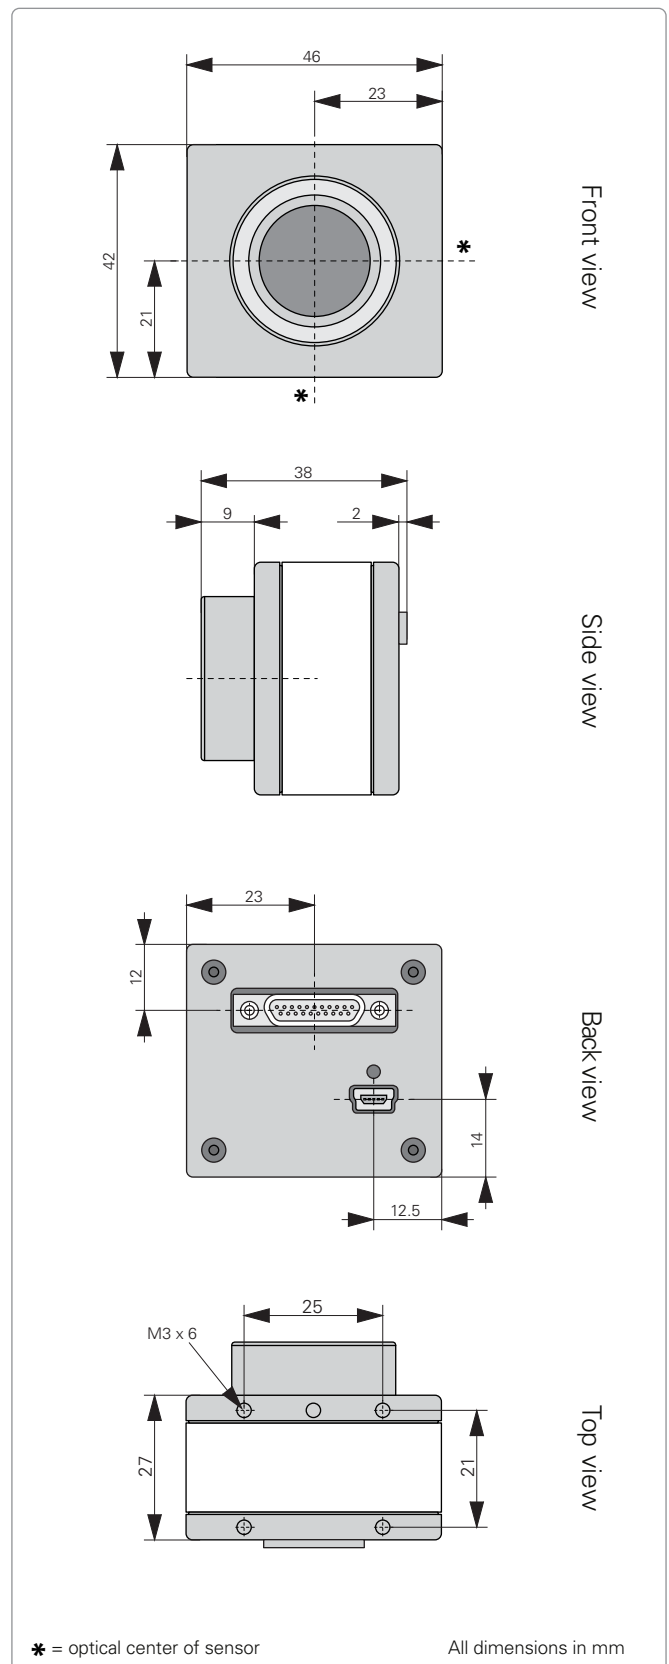

K-VRM68-03/2014 · Subject to technical change without notice. No liability is accepted for errors which may be contained in this document.