

USB components

VRmC-8+/C-PRO

Compact USB 2.0 Camera in Aluminium Housing

- Extra small form factor
- Highspeed USB interface
- Cost effective for high volumes
- SDK and API included, same API on all cameras
- Software trigger

Sensor Characteristics

Type	Aptina MT9T031
Technology	CMOS, rolling shutter
Mono/Color	color
Sensor Size	1/2"
Resolution	2056 x 1544
Pixel Size	3.2 μm x 3.2 μm
Max. Frame Rate *	13 Hz
Min. Exposure Time	60 μs
Bit Depth	8/10 bit
Pixel Clock	5 ... 48 MHz
Responsivity	> 1 V/lux-sec
Dynamic Range	61 dB linear

Camera Features

User programmable windowing and panning


Freely definable region of interest (ROI)

Adjustable anti-blooming circuit

Parallel operation of multiple cameras possible



Photo similar to original product

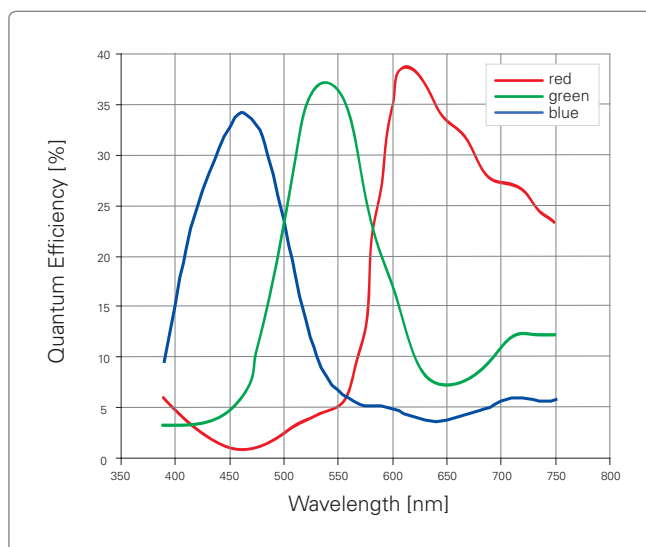

* Maximum value at full ROI with minimum exposure time. Actual value depends on pixel clock, sensor settings, and image format.

Physical Characteristics

Housing

Dimensions	36 x 36 x 27 mm
Material	anodized aluminium
Lens Mount	C-Mount (lens not included)
Filter glass	included

Ambient Conditions

Operating Temperature	0 ... +40 °C
Storage Temperature	-30 ... +80 °C


Interfaces

USB 2.0 port (USB Mini-B); power supply via USB

Options

Optics

- Filters: window glass, IR-pass/cut filter, without filter.

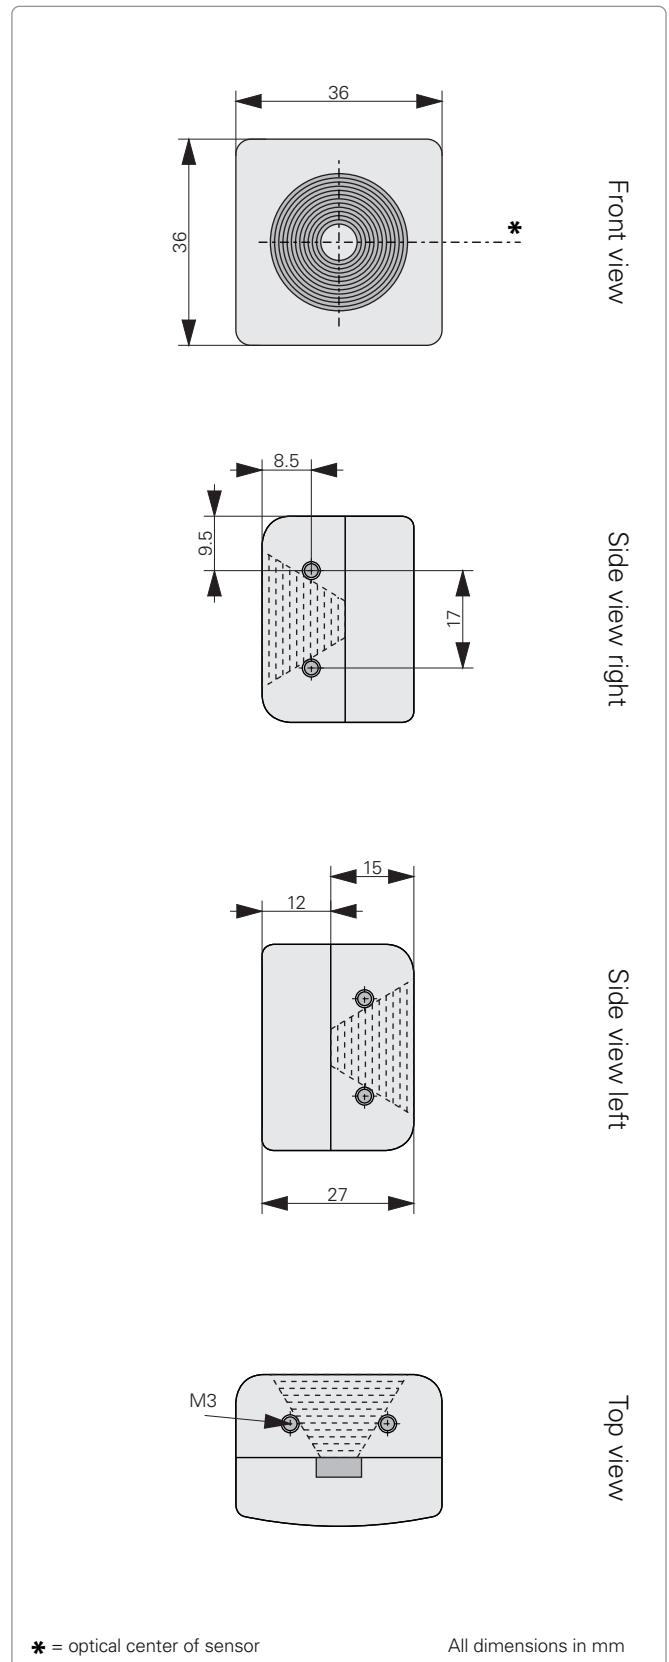

K-VRM59-03/2014 · Subject to technical change without notice. No liability is accepted for errors which may be contained in this document.