


## NEW GENERATION!

- Higher luminance
- Lower consumption
- Longer life cycle

# High Bright RGB led Backlight 50x50

PHLOX - LEDRGB - BL - 50x50 - S - Q - 1R - 24V

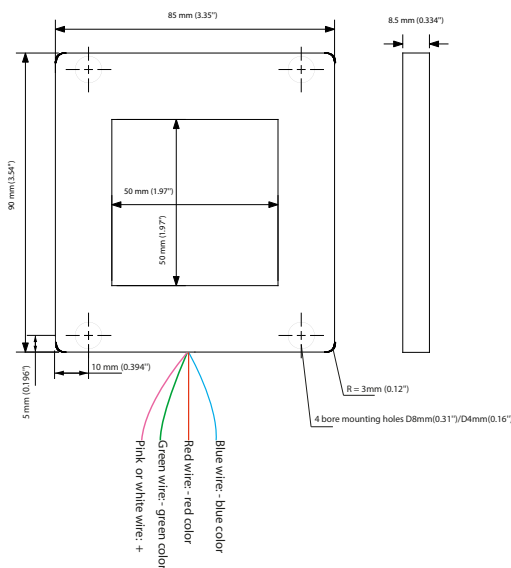

### Illumination

Luminance minimum  
Uniformity minimum  
Source Type  
Colour Temperature  
Light Angular Distribution  
Expected Life

**R: 6000; G: 10000; B: 900; W: 16900 cd/m<sup>2</sup> continuous mode**  
**≥95% (+/- 10%)**  
RGB LED  
Red: 630; Green: 520; Blue: 460 nm  
30° 1/2 angle  
**50 000 hours**

### Electrical

Input Voltage  
Input Current  
Cable length  
Connector  
Cable pinout  
CE Conformity  
Strobe mode

24 VDC (continuous mode)  
Red: 100; Green: 100; Blue: 40; W: 240mA (continuous mode)  
2 M ( PTFE color)  
None  
White: 24VDC; Red, Green, Blue: ground  
Yes  
Max. Cur: Red: 0.4; Green: 0.4; Blue: 0.16; White: 0.96 A  
Pulse Width: 10ms / Duty Ratio: 1/10

### Outer unit

L x W x H  
Housing Material  
Weight  
Mounting


90 x 85 x 8.5 mm (3.54 x 3.35 x 0.334")  
Black Anodized Aluminium  
120 g (4.2 oz)  
4 bore holes (D8 for the first 3.5 mm of height, D4 for the other 5.5 mm)

### Environmental

Max. Operating Humidity  
Operating Temperature  
Storage Temperature  
Shelf life  
Max. temp. on housing

95% non-condensing  
50°C (122°F) max  
60°C (140°F) max  
12 months from date of purchase  
+80°C (+176°F)

area of temperature measurement  
30mm all along the edges of the back of  
the black anodized aluminium housing  
(see image)



Do not cover the backlight when it's switched on.

### Accessories

**Power supply:** 110V and 220V  
Product key: OMRON-LED-PS-108x100x40-24V

### « Strobe » Control Module

GARDASOFT PP420 or PP820 Series Led Lighting Controllers  
You can find the nearest distributor on  
<http://www.gardasoft.com/LED-Controllers/RT-PP/>

CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

**RoHS** directive compliant

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity and luminance
- Seal of quality on the back

July 21 2015

High Bright RGB led Backlights by PHLOX® offer the **best life cycle, the best chromaticity stability and the best luminance on the market**, all in an ultra compact and IP-65 body. PHLOX® is the only manufacturer to provide uniformity and luminance datas on the quality control seal positioned at the back of every backlight.

### DESIGNED FOR YOUR APPLICATION

Bottle inspection (glass and plastic)  
Particle measurement  
Picture digitalization  
Dimensional control  
Shaping control  
Quality control with transparency.

### & YOUR INDUSTRIAL SECTOR

Glassmaking  
Pharmaceutical/Cosmetics  
Automotive  
Agribusiness  
Electronics  
Aeronautics and space.