


GT3400/3400C

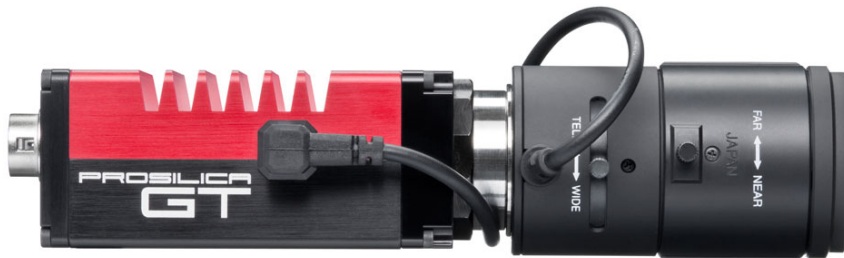

Description

9 Megapixel CCD camera for extreme environments - GigE Vision®



The Prosilica GT3400 is a 9 Megapixel camera with a Gigabit Ethernet interface (GigE Vision®). The GT3400 is a rugged camera designed to operate in extreme environments and fluctuating lighting conditions. It offers Precise iris lens control allowing users to fix the aperture size to optimize depth of field, exposure and gain without the need for additional control elements.

- Sony ICX814 sensor
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma, multiple LUT, color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Wide operating temperature range
- Global shutter (digital shutter)
- **Models:**
 - GT3400, 3384 x 2704, 12.7 fps, CCD mono
 - GT3400C, 3384 x 2704, 12.7 fps, CCD color

Specifications

Prosilica GT		3400
Interface	IEEE 802.3 1000baseT	
Resolution	3384 x 2704	
Sensor	Sony ICX814	
Sensor type	CCD Progressive	
Sensor size	Type 1	
Cell size	3.69 µm	
Lens mount	C-Mount (adjustable)	
Max frame rate at full resolution	12.7 fps	
A/D	14 bit	
On-board FIFO	128 MB	
Output		
Bit depth	14 (mono) - 12 (color) bit	
Mono modes	Mono8, Mono12, Mono12Packed, Mono14	
Color modes YUV	YUV411Packed, YUV422Packed	
Color modes RGB	RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed	
Raw modes	BayerRG8, BayerRG12, BayerRG12Packed	
General purpose inputs/outputs (GPIOs)		
TTL I/Os	1 input, 2 outputs	
Opto-coupled I/Os	1 input, 2 outputs	
RS-232	1	
Operating conditions/Dimensions		
Operating temperature	-20°C ... +60°C	
Power requirements (DC)	PoE, or 7-25 VDC	
Power consumption (12 V)	5.4 W @ 12 VDC	
Mass	224 g	
Body Dimensions (L x W x H in mm)	92 x 53.3 x 33 mm including connectors, w/o tripod and lens	
Regulations	CE, FCC Class A, RoHS (2011/65/EU)	

[Download Prosilica GT3400 technical drawing](#)

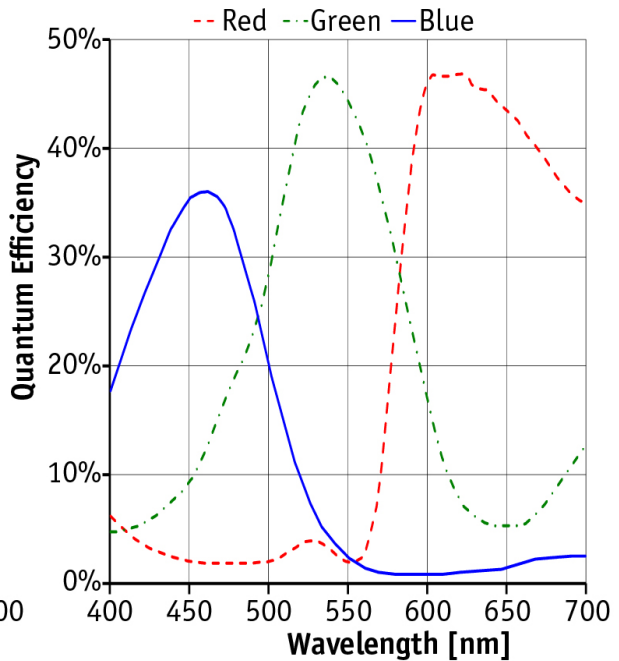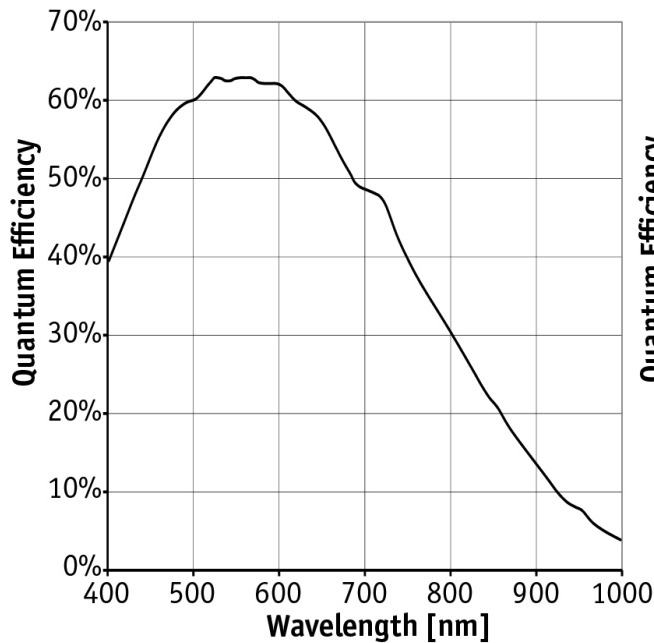

Smart features

The Prosilica GT3400 features include:

- Auto Exposure
- Auto Gain
- Auto White balance
- Flexible Binning
- Region of Interest readout (AOI partial scan)
- DSP subregion (selectable ROI for auto features)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma
- Multiple LUT
- Color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Recorder and Multiframe Acquisition Modes

Applications

The Prosilica GT3400 is ideal for a wide range of applications including:

- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- Machine vision
- Military and space applications